



Outstanding performance

- 22.5 m working height
- 18.3 m maximum outreach

Optimal productivity

- Best lifting speed 56 sec
- Fully proportional and simultaneous movements

Best comfort and safety feeling

- Rigid boom
- Single control for both steering axles

Optimized maintenance time

- Easy access to all components
- Easy boom maintenance
- New fully modular basket



Haulotte 
GROUP

More than lifting





HT23 RTJ


ROUGH TERRAIN TELESCOPIC BOOMS

TECHNICAL DATA

HT23 RTJ 2WS

HT23 RTJ 4WS

Working height	22.5 m	22.5 m
Platform height	20.5 m	20.5 m
Horizontal outreach	18.3 m	18.3 m
Lift capacity	230 kg (2 persons)	230 kg (2 persons)
F x G Platform size	2.44 x 0.91 m	2.44 x 0.91 m
A Length - stowed	10.4 m	10.4 m
H Length - storage	7.8 m	7.8 m
B Width	2.47 m	2.47 m
C Height - stowed	2.7 m	2.7 m
I Height - storage	3.3 m	3.3 m
Vertical jib rotation	133° (+68/-65)	133° (+68/-65)
Platform rotation	180° (+90/-90)	180° (+90/-90)
Boom rotation angle	90° (+75/-15)	90° (+75/-15)
Turntable rotation	360° continu	360° continu
Tailswing	109 cm	109 cm
D Wheelbase	2.5 m	2.5 m
E Ground clearance	34 cm	34 cm
Tilt	5°	5°
Drive speed	0.5 - 6.5 km/h	0.5 - 6.5 km/h
Gradeability	40 %	40 %
Turning radius - outside	6,3 m	3,4 m
Tires - foam-filled	385/65 - 22.5	385/65 - 22.5
Engine	Kubota 36.5 kW - 48.9 hp	Kubota 36.5 kW - 48.9 hp
Weight	13320 kg	13400 kg

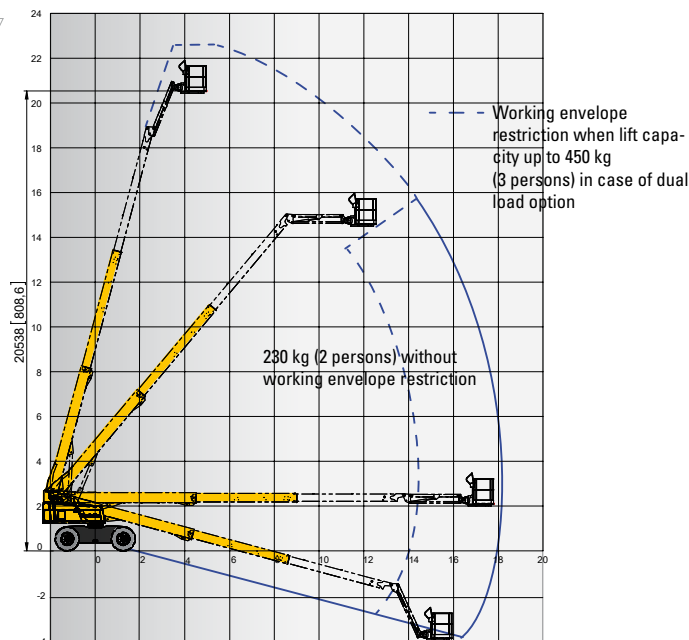

STANDARD EQUIPMENT

- 4 wheel drive / 2 or 4 wheel steer
- Automatic differential wheel lock increase rough terrain capacity
- Front oscillating axle increases stability on uneven ground
- Proportional controls enhance comfort and safety
- 4 simultaneous movements for maximum productivity
- 230 kg load capacity unrestricted working envelope
- Large modular basket now easier and faster to repair
- Drop bar entry gate
- Upper control box cover
- Tool tray
- Prepared for power to platform 110/230V
- Diagnostic display for fault and service alerts
- Swing out engine tray for ease of maintenance
- Hour meter
- Low fuel level indicator (upper & lower control boxes)
- Engine pre-heater with light indicator
- Sound and light alarm for tilt and load
- Maximum wind speed 45 km/h
- 12 V battery / electrical control system
- Electric pump system and emergency descent
- Boom maintenance (extension system, upper pads replacement) without boom disassembly
- Travel alarm

OPTIONS AND ACCESSORIES

- Dual load capacity 230 / 450 kg (2 / 3 persons)
- 3.5 kW generator
- Narrow modular platform: 1.83 m x 0.91 m
- Lateral swing door entry gate
- Power to platform (Female plug in the basket with or without circuit-breaker 30mA)
- Air line to platform 13 mm inner diameter
- Rotating beacon
- Work lights
- Biodegradable hydraulic oil
- Cold weather package
- Warm environment package
- 60 km/h wind speed

