


DINO[®] 230T

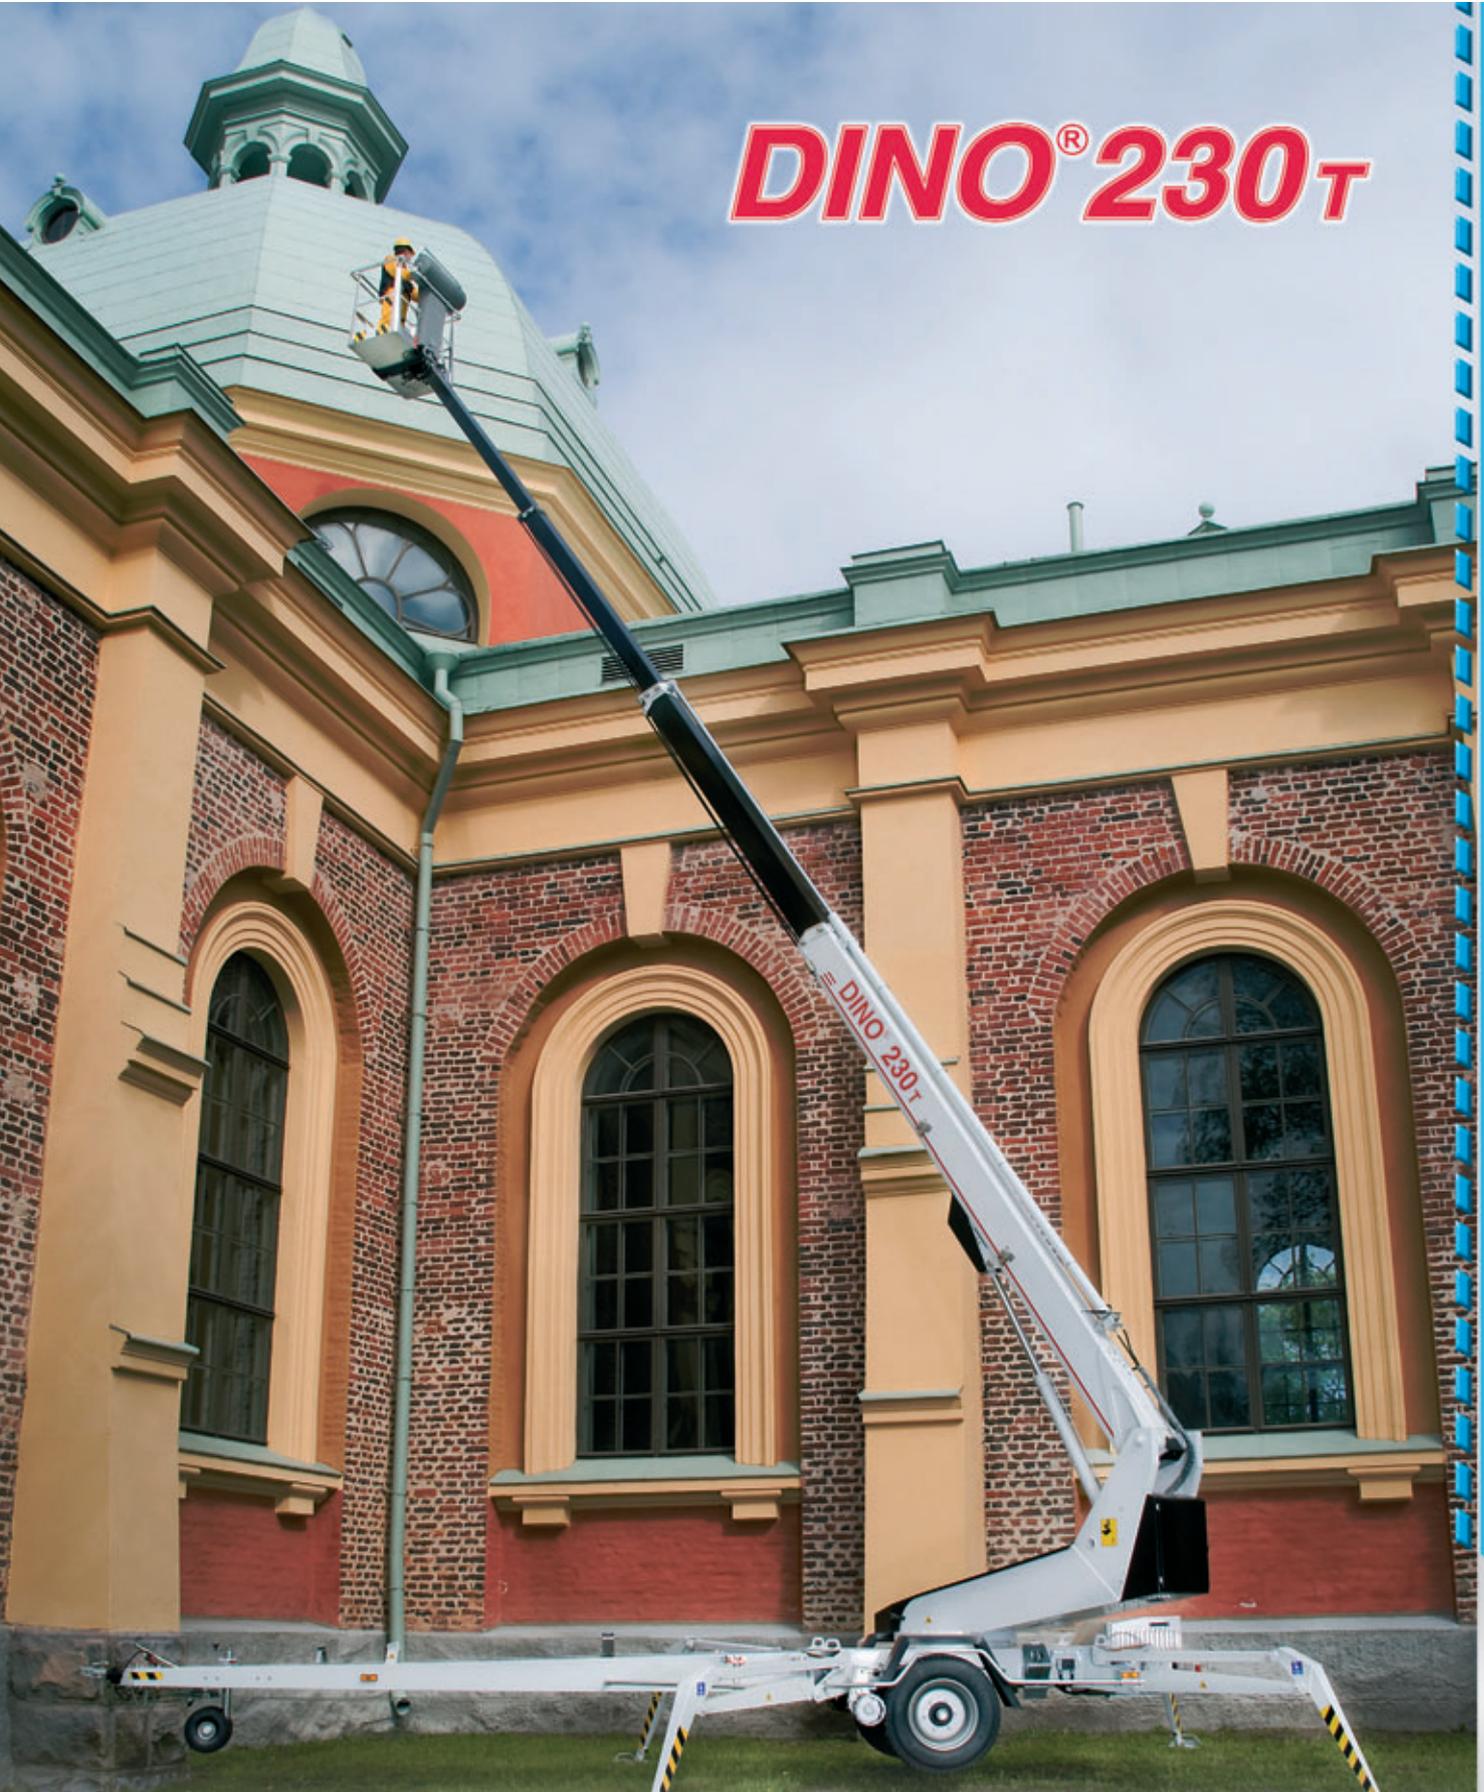

DINO Lift[®]

Get Lifted[™]

T-SERIES

DINO[®] 230T



Generator is standard equipment
 – providing a power source for both the platform and tools.




Ergonomic and safe driving positions
 – driving system can be operated either with the buttons on the chassis or with the remote cable control.



Long outreach, compact to transport
 – spider type outriggers enable long outreach and small transport dimensions.

Technical specification

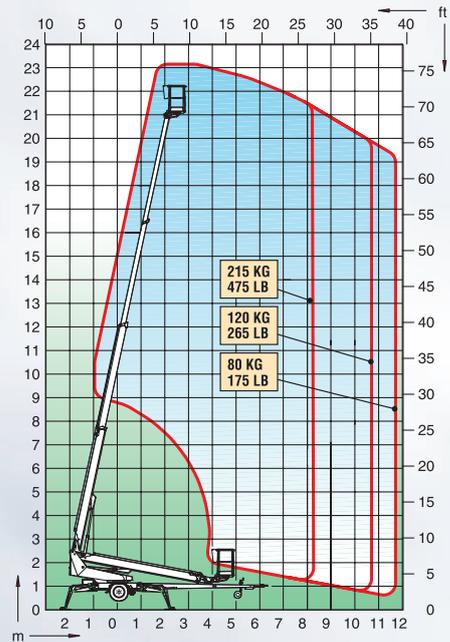

Max. working height	23.0 m	75'5"
Max. platform height	21.0 m	68'10"
Max. outreach	11.7 m	38'5"
Support width	4.4 m	14'5"
Lifting capacity	215 kg	475 lb
Basket size	0.7x1.3m	2'4" x 4'3"
Boom rotation	cont.	cont.
Basket rotation	90°	90°
Boom control	proport.	proport.
Transport length	8.15 m	26'9"
Transport width	2.05 m	6'9"
Transport height	2.24 m	7'4"
Weight	2960 kg	6525 lb
Driving system	std	std
AC-socket in the basket	std	std
Electro motor	std	std
Petrol power pack	std	std
Diesel power pack	opt.	opt.
Gradeability	25%	25%

The specification is subject to change without notice.

T-series DINOs are lightweight, compact and easy to operate.

Hydraulic outriggers enable quick and easy set up.

Proportional control and telescopic boom ensure stable and precise access to the work position even at long outreach.

DINO Lift[®]

Dinlift Oy • Raikkolantie 145
 FI-32210 Loimaa • Finland

Tel +358-2-76 25 900

Fax +358-2-76 27 160

Internet www.dinlift.com